



Product Ref: PRO-422 – I5-gauge red nylon/spandex, ¾ coated with water-based PU nitrile foam, sandy finish. Cut I

Sizes available: 7, 8, 9, 10 and 11

These products are classed as Personal Protective Equipment (PPE) by the UK 2019 SI696 Schedule 35 Regulation 38 and Regulation 2016/425 on PPE as brought into UK Law and Amended. They have been shown to comply with these Regulations through the Harmonized Standards BS EN 388:2016, BS EN 420:2003+AI:2009 and Designated Standards BS EN 388:2016, BS EN 420:2003+AI:2009.

Manufacturer:
Treadstone Products
Unit 36, Abenbury Way,
Wrexham Industrial Estate
Wrexham, UK, LLI3 9UZ
Tel: +44(0) 1978 664667
E-mail: info@treadstoneproducts.com
www.treadstoneproducts.com

Approval Body:
SATRA Technology Centre
Limited
Wyndham Way, Telford Way,
Kettering, Northamptonshire,
NN16 8SD, UK.
Tel: +44 (0) 1536 410000
email: info@satra.com
www.satra.com
(AB0321)

Notified Body:
CTC Groupe
4, rue Hermann Frenkel
69367 Lyon cedex 07
FRANCE
Tel.: +33 (0)4 72 76 10 10
Fax: +33 (0)4 72 76 10 00
E-mail: ctclyon@ctcgroupe.com
(Notified Body: 0075)

Care: Before removal, gloves should be cleared of any contamination.

Storage: When not in use, store the product in a dry place away from direct sunlight, sources of contamination and extremes of temperature.


Handling: New and used gloves should be thoroughly checked for signs of wear or damage (e.g. cuts or holes) before use. Do not use damaged gloves.

Performance and limitation of use – This product has been tested in accordance with:


BS EN 388:2016, BS EN 420:2003+AI:2009 (See table below)

BS EN 420:2003+AI:2009: Dexterity level 5

BS EN 388:2016:

| Tested in accordance with EN 388:2016  4 4 X | Requirement | Level |
|--|----------------------------|-------|
| | (6.1) Abrasion resistance | 4 |
| | (6.2) Blade cut resistance | I |
| | (6.4) Tear resistance | 4 |
| | (6.5) Puncture resistance | I |
| | (6.3) TDM Cut resistance | X |
| | (6.6) Impact protection | |

EN 388:2016

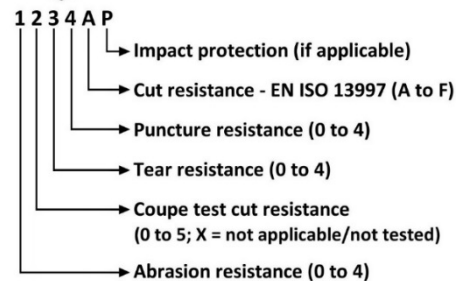

X: indicates that the glove has not been tested

EN 388:2016 Levels are based on the table below:

| TEST | LEVEL 1 | LEVEL 2 | LEVEL 3 | LEVEL 4 | LEVEL 5 | |
|---|---------|---|---------|---------|---------|---------|
| 6.1 Abrasion resistance (number of rubs) | 100 | 500 | 2000 | 8000 | - | |
| 6.2 Coupe test: Blade cut resistance (index) ^{1,2} | 1.2 | 2.5 | 5.0 | 10.0 | 20.0 | |
| 6.4 Tear resistance (N) | 10 | 25 | 50 | 75 | - | |
| 6.5 Puncture resistance (N) ³ | 20 | 60 | 100 | 150 | - | |
| <i>Levels of performance for materials tested with EN ISO 13997</i> | | | | | | |
| TEST | LEVEL A | LEVEL B | LEVEL C | LEVEL D | LEVEL E | LEVEL F |
| 6.3 TDM: cut resistance (N) ^{1,2} | 2 | 5 | 10 | 15 | 22 | 30 |
| <i>Levels of performance tested according to EN 13594:2015, 6.9 with impact energy of 5 J</i> | | | | | | |
| TEST | PASS | NOT TESTED / FAIL | | | | |
| Impact protection ⁴ | P | <BLANK> - No code or text is added if not tested or test failed | | | | |

Test results relate to the palm area of the glove unless otherwise stated

NOTE 1: For dulling during the cut resistance test (6.2), the coupe test results are only indicative while the TDM cut resistance test (6.3) is the reference performance result.

NOTE 2: There is no correlation between the levels of performance obtained with the 6.2 and 6.3 test methods.

NOTE 3: Gloves meeting the requirements for resistance to puncture may NOT be suitable for protection against sharply pointed objects such as hypodermic needles.

NOTE 4: Each area where impact protection is claimed shall be tested. Due to the test method (test specimen dimensions), protection against impacts on fingers cannot be tested. When the requirements of the impact test are fulfilled by the gloves, the marking code 'P' is added after the five performance levels number, otherwise no code is added.

Notes:

- (a) *Gloves are made of nylon/spandex dipped in water-based polyurethane nitrile foam.*
- (b) *Gloves are designated for protection against mechanical risks. Cat II Intermediate risk only. See performance data.*
- (c) *Protection is limited to part of the hand only.*
- (d) *Not suitable for use where there is a risk of entanglement (for example near moving machinery), chemical risk or electrical risk.*
- (e) *These gloves are not suitable for washing. Do not launder or wash. Gloves can be cleaned using a damp cloth or similar.*
- (f) *Some gloves may contain ingredients, such as natural rubber latex and accelerators which could potentially cause irritation / allergic reaction. In case of any adverse reaction / irritation, seek medical advice.*
- (g) *Retain these instructions for future reference.*

For further information, user instructions, DoC or details of our full range scan QR code or go to:
<https://www.treadstoneproducts.com/treadstone-safety>:

Product made in China

