


Product Ref: ONL-453 – Economy HPPE palm coated PU glove. Cut F
Sizes available: 7, 8, 9, 10 and 11

These products are classed as Personal Protective Equipment (PPE) by the UK 2019 S1696 Schedule 35 Regulation 38 and Regulation 2016/425 on PPE as brought into UK Law and Amended. They have been shown to comply with these Regulations through the Harmonized Standards EN 388:2016+A12018, EN ISO 21420:2020 and Designated Standards EN 388:2016+A12018, EN ISO 21420:2020

Manufacturer:

Treadstone Products
Topwood Farm Annex,
Dog Lane
Malpas, UK, SY14 7BY
Tel: +44(0) 1978 664667
E-mail: info@treadstoneproducts.com
www.treadstoneproducts.com

Approval Body:

UKCA:
Self-Certified in accordance
with Regulation 2016/425 as
incorporated into UK Law

**Notified Body responsible for
EU Type examination:**

Eurofins Textile & Footwear Testing
Spain
C/Germán Bernácer 4, 03203 Elche
(Alicante)
(+34 966 299 638)

Care: Before removal, gloves should be cleared of any contamination.

Storage: When not in use, store the product in a dry place away from direct sunlight, sources of contamination and extremes of temperature.


Handling: New and used gloves should be thoroughly checked for signs of wear or damage (e.g., cuts or holes) before use. Do not use damaged gloves.

Donning & Doffing: Inspect gloves for holes, damage & contamination. Pick up both glove inside the wrist. Insert hands into each glove holding the wrist band to pull glove into position. To remove the gloves, hold the fingers to secure to secure each glove, carefully pull hand out partially. Repeat procedure with other hand, with partially gloved hand to avoid any contamination (if applicable), pull one hand out first leaving finger tips inside wrist, use covered fingers to remove the other glove.


Performance and limitation of use – This product has been tested in accordance with:
EN 388:2016+A1:2018, EN ISO 21420:2020 (See table below)

Dexterity level 5

BS EN 388:2016+A1:2018

Tested in accordance with EN 388:2016  4 X 4 3 F	Requirement	Level
	(6.1) Abrasion resistance	4
	(6.2) Blade cut resistance	X
	(6.4) Tear resistance	4
	(6.5) Puncture resistance	3
	(6.3) TDM Cut resistance	F
	(6.6) Impact protection	

EN 388:2016

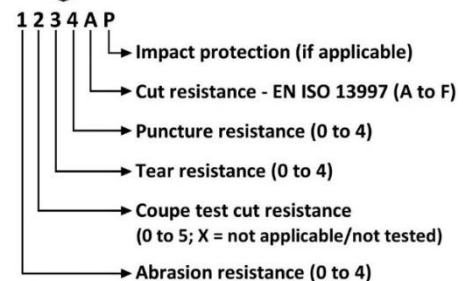

X: indicates that the glove has not been tested

EN 388:2016+A1:2018 Levels are based on the table below:

TEST	LEVEL 1	LEVEL 2	LEVEL 3	LEVEL 4	LEVEL 5	
6.1 Abrasion resistance (number of rubs)	100	500	2000	8000	-	
6.2 Coupe test: Blade cut resistance (index) ^{1, 2}	1.2	2.5	5.0	10.0	20.0	
6.4 Tear resistance (N)	10	25	50	75	-	
6.5 Puncture resistance (N) ³	20	60	100	150	-	
<i>Levels of performance for materials tested with EN ISO 13997</i>						
TEST	LEVEL A	LEVEL B	LEVEL C	LEVEL D	LEVEL E	LEVEL F
6.3 TDM: cut resistance (N) ^{1, 2}	2	5	10	15	22	30
<i>Levels of performance tested according to EN 13594:2015, 6.9 with impact energy of 5 J</i>						
TEST	PASS	NOT TESTED / FAIL				
Impact protection ⁴	P	<BLANK> - No code or text is added if not tested or test failed				

Test results relate to the palm area of the glove unless otherwise stated

NOTE 1: For dulling during the cut resistance test (6.2), the coupe test results are only indicative while the TDM cut resistance test (6.3) is the reference performance result.

NOTE 2: There is no correlation between the levels of performance obtained with the 6.2 and 6.3 test methods.

NOTE 3: Gloves meeting the requirements for resistance to puncture may NOT be suitable for protection against sharply pointed objects such as hypodermic needles.

NOTE 4: Each area where impact protection is claimed shall be tested. Due to the test method (test specimen dimensions), protection against impacts on fingers cannot be tested. When the requirements of the impact test are fulfilled by the gloves, the marking code 'P' is added after the five performance levels number, otherwise no code is added.

Notes:

- (a) *Gloves are made of HPPE with PU coated palm.*
- (b) *Gloves are designated for protection against mechanical risks. Cat II Intermediate risk only. See performance data.*
- (c) *Protection is limited to part of the hand only.*
- (d) *Not suitable for use where there is a risk of entanglement (for example near moving machinery), chemical risk or electrical risk.*
- (e) *These gloves are not suitable for washing. Do not launder or wash. Gloves can be cleaned using a damp cloth or similar.*
- (f) *Some gloves may contain ingredients, such as natural rubber latex and accelerators which could potentially cause irritation / allergic reaction. In case of any adverse reaction / irritation, seek medical advice.*
- (g) *Retain these instructions for future reference.*

For further information, user instructions, declaration of conformity or details of our full range scan QR code or go to:
<https://www.treadstoneproducts.com/treadstone-safety/>

Product made in China

